




ERC 小径コレットホルダ Collet Holder For Small Diameters

干渉が厳しいドリル加工用に最適。
For drilling in tight space.

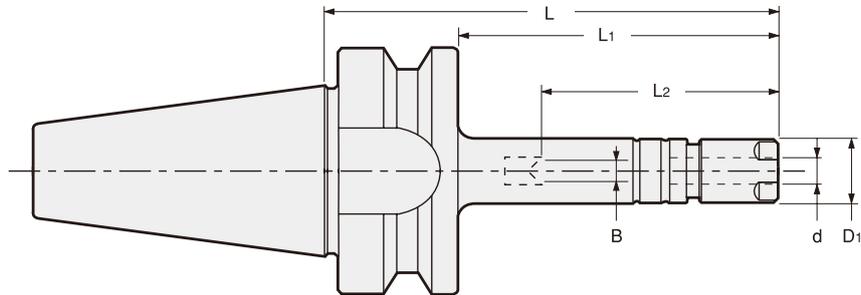

商品コード Code	型式 Model	d	L	L1	B	L2	D1	キャップ Nut	kg	—	コレット Collet	スパナ Spanner
2550 00108045	BT30 -ERC8 -45	0.5 ~ 5.0	45	23	— (0 ~ 2.4)	³⁴ (19 ~ 31)	12	ERP-8	0.40	43,240	ER8	S-8E
2550 00108060	-60	0.5 ~ 5.0	60	38	— (0 ~ 2.4)	³⁴ (19 ~ 31)	12	ERP-8	0.40	43,240		
2550 00108075	-75	0.5 ~ 5.0	75	53	— (0 ~ 2.4)	³⁴ (19 ~ 31)	12	ERP-8	0.41	43,240		
2550 00108090	-90	0.5 ~ 5.0	90	68	— (0 ~ 2.4)	³⁴ (19 ~ 31)	12	ERP-8	0.41	43,590		
2550 00108105	-105	0.5 ~ 5.0	105	83	— (0 ~ 2.4)	³⁴ (19 ~ 31)	12	ERP-8	0.42	43,590		
2550 00108135	-135	0.5 ~ 5.0	135	113	— (0 ~ 2.4)	³⁴ (19 ~ 31)	12	ERP-8	0.45	44,070		
2550 00110045	-ERC11S-45	0.5 ~ 7.0	45	23	0 ~ 4	22 ~ 40	16	ERP-11S	0.40	41,810	FDC-07	S-11E
2550 00110060	-60	0.5 ~ 7.0	60	38	0 ~ 4	22 ~ 45	16	ERP-11S	0.41	41,810		
2550 00110075	-75	0.5 ~ 7.0	75	53	0 ~ 4	22 ~ 45	16	ERP-11S	0.43	41,810		
2550 00110090	-90	0.5 ~ 7.0	90	68	0 ~ 4	22 ~ 45	16	ERP-11S	0.45	42,410		
2550 00110105	-105	0.5 ~ 7.0	105	83	0 ~ 4	22 ~ 45	16	ERP-11S	0.46	42,410		
2550 00110135	-135	0.5 ~ 7.0	135	113	0 ~ 4	22 ~ 45	16	ERP-11S	0.50	42,760		
2550 00308060	BT40 -ERC8 -60	0.5 ~ 5.0	60	33	— (0 ~ 2.4)	³⁴ (19 ~ 31)	12	ERP-8	0.98	44,310	ER8	S-8E
2550 00308075	-75	0.5 ~ 5.0	75	48	— (0 ~ 2.4)	³⁴ (19 ~ 31)	12	ERP-8	0.98	44,310		
2550 00308090	-90	0.5 ~ 5.0	90	63	— (0 ~ 2.4)	³⁴ (19 ~ 31)	12	ERP-8	0.98	44,660		
2550 00308105	-105	0.5 ~ 5.0	105	78	— (0 ~ 2.4)	³⁴ (19 ~ 31)	12	ERP-8	0.99	44,660		
2550 00308135	-135	0.5 ~ 5.0	135	108	— (0 ~ 2.4)	³⁴ (19 ~ 31)	12	ERP-8	1.01	45,380		
2550 00310060	-ERC11S-60	0.5 ~ 7.0	60	33	0 ~ 4	22 ~ 45	16	ERP-11S	0.99	43,000	FDC-07	S-11E
2550 00310075	-75	0.5 ~ 7.0	75	48	0 ~ 4	22 ~ 45	16	ERP-11S	1.00	43,000		
2550 00310090	-90	0.5 ~ 7.0	90	63	0 ~ 4	22 ~ 45	16	ERP-11S	1.00	43,480		
2550 00310105	-105	0.5 ~ 7.0	105	78	0 ~ 4	22 ~ 45	16	ERP-11S	1.02	43,480		
2550 00310135	-135	0.5 ~ 7.0	135	108	0 ~ 4	22 ~ 45	16	ERP-11S	1.06	44,070		

- コレット、スパナは別途ご注文下さい。
 - ERC8用プリセットスクリュー ES8は別売になります。ERC11Sには標準プリセットスクリュー HDS-07A-ES11が付属しています。
 - 「B」,「L2」の () 内の数値はプリセットスクリュー ES8を使用した時の値です。
 - クーラントコレットをご使用になる場合の最低挿入長は P. 097 を参照下さい。
 - キャップの締め付けトルクに関しては、P. 554 を参照ください。
- Collet and spanner are sold separately.
 - ES8, a preset screw for ERC8, is sold separately. ERC11S includes a standard preset screw HDS-07A-ES11.
 - " B " and " L2 " dimensions in brackets are for using ES8 preset screw.
 - Refer to P. 097 for minimum tool insertion length in case of using our coolant collets.
 - See P. 554 for standard tightening torque.

FDC コレット FDC Collet	ER コレット ER Collet	スパナ Spanner	プリセットスクリュー Preset screw
P. 092	P. 096	P. 098	P. 100

ご注文例 Ordering Example

BT40 - ERC8 - 105

シャンクサイズ
Shank size

突き出し長さ (L)
Projection length