




ERZ 小径"R"ゼロホルダ "R"Zero Holder For Small Diameters

干渉が厳しいドリル加工用に最適な振れ調整ホルダです。
Holder with runout adjustment mechanism. Suitable for drilling in tight space.

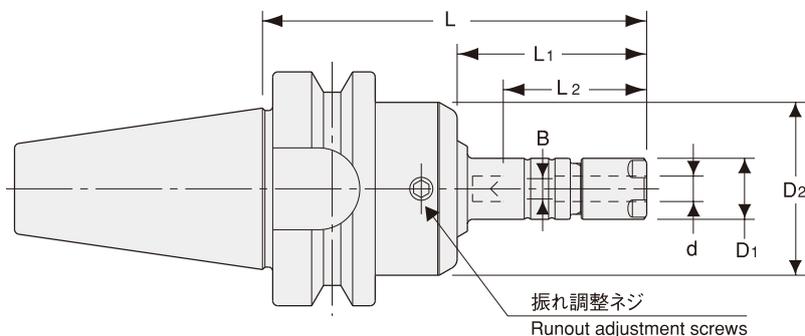

BT
AHO-A
HSK-A/E/F/C
HSK-T
C
UTS
ST
専用機
関連機器
プッシュ・メトリ

ミリングチャック
Milling Chuck

コレットホルダ
Collet Holder

ERZゼロホルダ
ERZ Zero Holder

ハイドロチャック
Hydraulic Chuck

シリンクチャック
Shrink Fit

タッピングチャック
Tapping Chuck

エアバ類
Airbars

マルチホールシステム
Multihole tool system

機能型ホルダ
Function Holder

SPEDIO 用
ターニングツール
Turning tools for SPEDIO

リテンションスタッド
Retention Stud

シャンク寸法
Shank Dimensions

商品コード Code	型式 Model	d	L	L1	B	L2	D1	D2	キャップ Nut	kg	—	コレット Collet	スパナ Spanner	レンチ Wrench
3130 00108060	BT30 -ERZ8 -60	0.5 ~ 5.0	60	22	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	ERP-8	0.5	47,080	ER8	S-8E	L-3T
3130 00108075	-75	0.5 ~ 5.0	75	37	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	ERP-8	0.5	47,080			
3130 00108090	-90	0.5 ~ 5.0	90	52	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	ERP-8	0.5	47,520			
3130 00108105	-105	0.5 ~ 5.0	105	67	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	ERP-8	0.6	47,520			
3130 00110060	-ERZ11S -60	0.5 ~ 7.0	60	22	0 ~ 4	22 ~ 42	16	34	ERP-11S	0.5	45,570	FDC-07	S-11E	L-3T
3130 00110075	-75	0.5 ~ 7.0	75	37	0 ~ 4	22 ~ 42	16	34	ERP-11S	0.5	45,570			
3130 00110090	-90	0.5 ~ 7.0	90	52	0 ~ 4	22 ~ 42	16	34	ERP-11S	0.6	46,220			
3130 00110105	-105	0.5 ~ 7.0	105	67	0 ~ 4	22 ~ 42	16	34	ERP-11S	0.6	46,220			
3130 00308075	BT40 -ERZ8 -75	0.5 ~ 5.0	75	32	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	ERP-8	1.1	48,270	ER8	S-8E	L-3T
3130 00308090	-90	0.5 ~ 5.0	90	47	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	ERP-8	1.1	48,700			
3130 00308105	-105	0.5 ~ 5.0	105	62	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	ERP-8	1.1	48,700			
3130 00308135	-135	0.5 ~ 5.0	135	92	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	ERP-8	1.1	49,460			
3130 00310075	-ERZ11S -75	0.5 ~ 7.0	75	32	0 ~ 4	22 ~ 42	16	34	ERP-11S	1.1	46,870	FDC-07	S-11E	L-3T
3130 00310090	-90	0.5 ~ 7.0	90	47	0 ~ 4	22 ~ 42	16	34	ERP-11S	1.1	47,410			
3130 00310105	-105	0.5 ~ 7.0	105	62	0 ~ 4	22 ~ 42	16	34	ERP-11S	1.1	47,410			
3130 00310135	-135	0.5 ~ 7.0	135	92	0 ~ 4	22 ~ 42	16	34	ERP-11S	1.2	48,060			

- コレット、スパナ、振れ調整レンチは別途ご注文下さい。
- ERZ8 用プリセットスクリュー ES8 は別売になります。
ERZ11S には標準プリセットスクリュー HDS-07A-ES11 が付属しています。
- 「B」、「L2」の () 内の数値はプリセットスクリュー ES8 を使用した時の値です。
- クーラントコレットとタング付刃具併用時の最低挿入長は P.097 を参照下さい。
- キャップの締め付けトルクに関しては、P.554 を参照ください。

ご注文例 Ordering Example

BT40 - ERZ8 - 105

シャンクサイズ
Shank size

突き出し長さ (L)
Projection length

- Collet, spanner and adjustment wrench are sold separately.
- ES8, a preset screw for ERZ8, is sold separately.
ERZ11S includes a standard preset screw HDS-07A-ES11.
- " B " and " L2 " dimensions in brackets are for using ES8 preset screw.
- Refer to P. 097 for minimum tool insertion length in case of using our coolant collets.
- See P. 554 for standard tightening torque.

FDC コレット FDC Collet	ER コレット ER Collet	スパナ Spanner	プリセットスクリュー Preset screw	振れ調整レンチ Adjustment wrench
P. 092	P. 096	P. 098	P. 100	P. 099